


Pilot Light LED Integrated Monoblock

Ø22mm, 24V to 230VAC

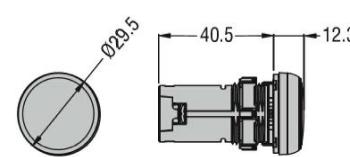

LPML	M	3
Range Name	Supply Voltage	Color Code

Type		Pilot Light LED Integrated Monoblock				
		LPML				
Supply voltage [Us]		230 VAC (-15%+10%)				
Color		Green	Red	Yellow	Blue	Transparent
Type of positions		Monobloc pilot light				
Material		Polyamide				
Degree of protection		IP67, IP69K on front, IP20 on rear				
Electrical life		>30000 hours				
Rated frequency		50-60Hz				
Standard		CSA C22.2 n° 14, IEC/EN/BS 60947-1, IEC/EN/BS 60947-5-1, UL508				
Temperature	Operating min	-20°C				
	Operating max	+70°C				
Mount		Ring fixing Ø22mm				
Conductor section		2.5mm ² , 18...16AWG				
Terminal		Screw termination				
Dimension						

Pilot Light LED Integrated Monoblock

Ø22mm, 24V to 230VAC



LPMLM4

Pilot Light LED Integrated Monoblock

Head Shape	Size	Supply Voltage	Color	Reference
Round Ø29.5 mm	Ø22mm	230VAC	Green	LPMLM3
			Red	LPMLM4
			Yellow	LPMLM5
			Blue	LPMLM6
			Transparent	LPMLM7



LPMLM5