


Motorised Changeover Switches ATyS S

4P from 40 to 125A

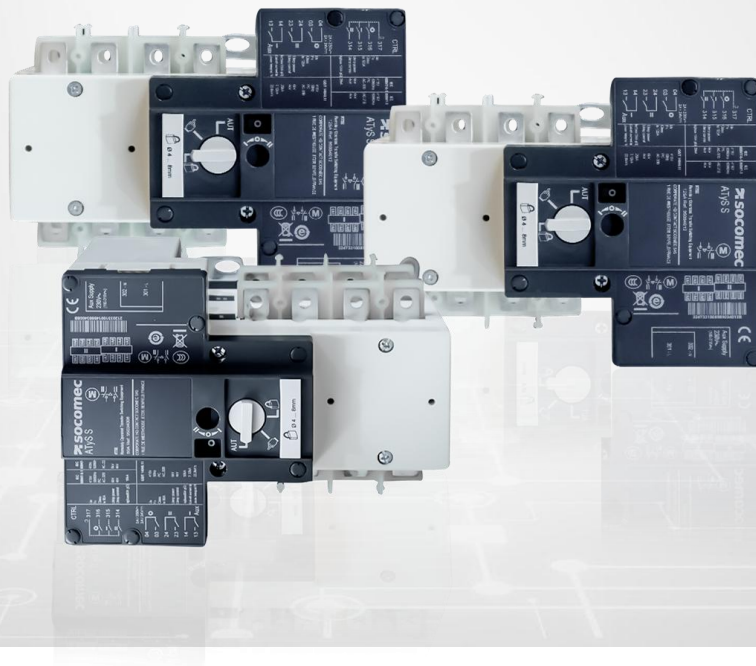

9503

Product
Family

4

Number of
Pole

006

Rated
Current

Type		Motorised Changeover Switches ATyS S [9503]
Switching mode		Auto , manual mode selector switch
Number of pole		4P
Rated current		40, 63, 80,100, 125A
Auxiliary power supply		230VAC
Operating handle		I-O-II
Interlock able		Yes
Operating cycles		25000
Standard		IEC 60947-6-1, IEC 60947-3 GB/T14048-11
Terminal	Connection	Lug type (Cable Rigid=50mm² Flexible=35mm²)
	Torque N.m	3 N.m
Mount		Back-plate mounting
Rated operating voltage		400~415VAC
Degree of protection		IP20
Dimension		

Motorised Changeover Switches ATyS S

4P from 40 to 125A



950340--

Motorised Changeover Switches ATyS S from 40A to 125A

Pole	Description	Rating (A)	Reference
4P	Motorized Transfer Switch	ATyS S 40A	95034004
	Motorized Transfer Switch	ATyS S 63A	95034006
	Motorized Transfer Switch	ATyS S 80A	95034008
	Motorized Transfer Switch	ATyS S 100A	95034010
	Motorized Transfer Switch	ATyS S 125A	95034012