

Soft Starter With Integrated Bypass Relay

3 Phase from 2.2kW rated at 400V to 160kW

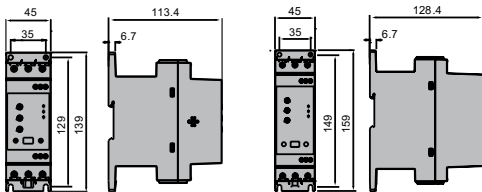
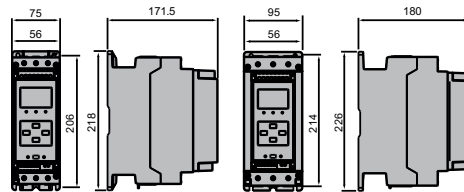


ADXNB

018

Range
Name

Rated
current

Type		Soft Starter								
		ADXNB					ADXL			
Rated starter current [Ie]		18A	25A	30A	38A	45A	60A	75A	85A	115A
Rated supply voltage [Ue]		208...600VAC								
Auxiliary supply [Us]		100...240VAC								
Type of system		3 Phase								
Relative humidity		< 80%								
Operating temperature		- 20°C to +60°C								
Programming with NFC		No					Yes			
Standard		CSA C22.2 n° 14, IEC/EN 60947-1, IEC/EN 60947-4-2, UL60947-4-2					CSA C22.2 n° 14, IEC/EN 60947-1, IEC/EN 60947-4-2, UL508			
Rated power	Ratings kW.	7.5	11	15	18.5	22	30	37	45	55
	Ratings HP	10	10	15	20	25	30	40	50	60
Mount		Screw-fixing or 35mm DIN rail					Screw-fixing			
Size (H-W-D) mm		139x45x113.4	159x45x128.4			220x75x170	226x95x180			
Terminal		Screw, Flexible 25mm², Rigid 35mm²								
Dimension										

Soft Starter With Integrated Bypass Relay

3 Phase from 2.2kW rated at 400V to 160kW



ADXNB012



ADXNB045



ADXNF045



ADXL0018600



ADXL0115600



ADXL0162600

Soft Starter Auxiliary Supply 100~240VAC. Rated operational voltage 208~600VAC

Power @400V 3phase (kW)	Power @415V 3phase (HP)	Rated starter current I _e	Interface	Digital outputs	Reference
Soft starter, ADXNB... type, basic version, with integrated by-pass					
2.2	2	6A	-	2 NO-5A	ADXNB006
5.5	5	12A	-	2 NO-5A	ADXNB012
7.5	10	18A	-	2 NO-5A	ADXNB018
11	10	25A	-	2 NO-5A	ADXNB025
15	15	30A	-	2 NO-5A	ADXNB030
18.5	20	38A	-	2 NO-5A	ADXNB038
22	25	45A	-	2 NO-5A	ADXNB045
Soft starter, ADXNP... type, NFC version, with integrated by-pass					
2.2	2	6A	NFC	2 NO-5A	ADXNF006
5.5	5	12A	NFC	2 NO-5A	ADXNF012
7.5	10	18A	NFC	2 NO-5A	ADXNP018
11	10	25A	NFC	2 NO-5A	ADXNF025
15	15	30A	NFC	2 NO-5A	ADXNF030
18.5	20	28A	NFC	2 NO-5A	ADXNF038
22	25	45A	NFC	2 NO-5A	ADXNF045
Soft starter, ADXL... type, NFC version, with integrated by-pass LCD display					
30	30	60A	NFC	2 NO,1C/O -3A	ADXL0060600
37	40	75A	NFC	2 NO,1C/O -3A	ADXL0075600
45	50	85A	NFC	2 NO,1C/O -3A	ADXL0085600
55	60	115A	NFC	2 NO,1C/O -3A	ADXL0115600
75	75	135A	NFC	2 NO,1C/O -3A	ADXL0135600
90	75	162A	NFC	2 NO,1C/O -3A	ADXL0162600